

SI1M4644D




Product Family

Built-in type Ultra-low profile or Fully Flushed

Hob

Dimensions60 cmPower supplyElectricTypeInduction

EAN code 8017709305635

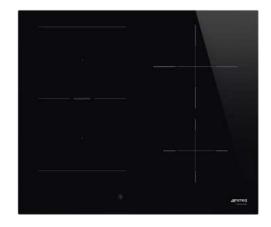

Aesthetics





AestheticClassicaColourBlackFinishingGlassMaterialGlassGlass typeCeramicGlass edgeStraight edgeType of control settingCompact Slider Plus

SliderYesLED coloursRedControl knob positionFrontSerigraphy colourGrey

Programme / Functions





No. of induction cook zones 4

Time-setting options Spegnimento automatico

No. of cooking zones with booster 4
No. of Flexible zones 1

Main on/off switchYesPower levels9Auto-vent 2.0YesTotal no. of cook zones4



Options



Multizone Option Yes End of cooking alarm Yes
Flexible Zone Type MultiZone Residual time indicator Yes
Workton Cut Out 478, 483×555, 560 mm Limited Power Side

Worktop Cut-Out 478-482x555-560 mm Limited Power Si Advance
Auto Multizone Yes Consumption Mode

Double Booster Yes Limited Power 2400 a 7400 - step 100 W

Double Booster Yes Limited Power
Keep warm automatic Yes Consumption Mode in W

function Showroom Demo Option Yes
Grill function Yes Control Lock / Child Yes

Grill function Yes Control Lock / Child Yes End cooking timer 4 Safety

Rayso antion Yes Cleaning option Yes

Pause option Yes

Minute minder

1

Quick start

Rapid level selection

Yes

Rapid level selection

Technical Features



Front-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - 21.0x19.0 cm

Rear-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 21.0x19.0 cm

Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Double booster 3.00 kW - - Ø 21.0 cm

Front-right - Induction - Single - 1.40 kW - Booster 2.10 kW - - Ø 16.0 cm

Multizone left - Booster 3.70 kW - 38.5x23.0 cm

Automatic setting Yes Automatic switch off Yes according to pan when overflow

dimensionResidual heat indicatorYespan detectionYes, min 7 cmEco-HeatYesPermanent AutomaticYesProtection againstYes

Pot Detection with accidental start up indication of the relative

Yes

indication

Minimum pan diameter

marcation

Automatic switch off Yes

when overheat

control

Electrical Connection

Plug Not present Type of electric cable Yes, Single phase installed rating (W)

Not present Type of electric cable Yes, Single phase installed
Additional connection Yes, Double and Three


 Current
 33 A
 modalities
 Phase

 Voltage (V)
 220-240 V
 Frequency (Hz)
 50/60 Hz

 Voltage 2 (V)
 380-415 V
 Power supply cable
 120 cm

length
Terminal box 5 poles



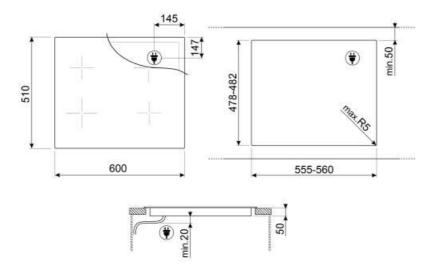



Not included accessories

GRILLPLATE



Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

TPKPLATE



Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs



Symbols glossary (TT)

reached.

has been in use.

Time elapsed: shows how long the cooking zone

O	Automatic merge of zones for a bigger area	O _j	Permanent auto pot detection
<u>☆</u>	Connection between hob and hood	P	Power booster: option allows the zone to work at full power when very intense cooking is necessary.
δ	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.	COMPACT FLUS Slider	Compact Slider back-lighted ghost effect
9	The slider control panel allows you to adjust the power simply by passing your finger across the touch device.	/48 ₅₆ \	CUT_OUT_STANDARD_72dpi
BOOST	Additional maximum power level for a better energy consumption	ECO HEAT ==_	Eco-Heat: this function warns when the zone is still hot after being switched off. As well as ensuring maximum safety by preventing burns, this also allows you to make use of residual heat to continue cooking or keep foods hot.
Ē	Grill function	<i>"</i>	This function allows you to keep cooked food warm without burner it
STOP °C∓	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.
; <u>ö</u>	Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility		Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.
(Ton)	Min diameter pot detection of 7 cm	(1)	All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.
logic ADYANG	Possibility to set the maximum power absorbion of the hob	† P † 14 † 10 † 5	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).
4	Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is	H	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops helpy

SMEG SPA 3/12/2024

remains hot. When the temperature drops below

Timer: All ceramic hobs have a timer which

automatically ends cooking after a preset time.

60 ° C, the indicator goes out.